


# PESATRICE ELETTRONICA P15-126



**User friendly touch screen programming**



## **PESATRICE ELETTRONICA mod. P15-126**

Pesatrice dosatrice ponderale per prodotti ortofruitticoli composta da:

- Sistema di distribuzione frutta con 4 piattaforme vibranti.
- Alimentazione e trasporto prodotti, per mezzo di 15 canali vibranti passo 200mm.
- N° 15 Tramogge di pesatura a celle di carico di grande capacità di contenimento (dimensioni interne 190x290x330 circa) e a doppia apertura.
- Possibilità di avere 3 o 4 scarichi alimentati da nastri trasportatori dedicati, a loro volta alimentati con flap superiori di smistamento dei prodotti provenienti dalle tramogge di pesatura combinate a formare il peso impostato.
- Adatta all'alimentazione simultanea di 3 o 4 distinte confezionatrici a seconda della configurazione, ed eventualmente estendibile tramite ulteriori nastri trasversali.
- Quadro elettronico per il funzionamento automatico, completo di Touch-screen, per l'impostazione programmi e parametri di lavoro, (peso, tolleranza, ecc.) e per la visualizzazione dei dati di pesatura.

Prodotti lavorabili: Patate – cipolle – agrumi – avocado ed equivalenti.

Peso delle confezioni: da 0,5 a 25 kg



## **ELECTRONIC WEIGHER MACHINE mod. P15-126**

Dosing weigher for fruits and vegetables composed of:

- Product conveying system with 4 vibrating platforms.
- Product in-feed and conveyance by 15 vibrating channels, pitch 200mm.
- No. 15 high capacity weighing hoppers with loading cells (internal dimensions 190x290x330 approx.) and double opening.
- 3 or 4 discharges fed by conveyor belts, which, in turn, are fed by upper flaps. The flaps receive the product, already matched to obtain the set weight, from the weighing hoppers and then sort it.
- Designed to feed simultaneously 3 or 4 different packing machines depending on configuration. Possibility to work with more packing machines by adding cross conveyors.
- Electronic panel for the automatic mode with touch screen for setting working programs and parameters (weight, tolerance, etc.) and for displaying weighing data.

Products: Potato – onion – citrus – avocado and equivalent.

Bag Weight: from 0,5 to 25 kg

# DATI TECNICI/TECHNICAL DATA

PRODUZIONE  
OUTPUT

3 discharges belt conveyor

1 kg

2,5 kg

5 kg

up to  
**95**  
packs/min

up to  
**90**  
packs/min

up to  
**53**  
packs/min

4 discharges belt conveyor

up to  
**115**  
packs/min

up to  
**102**  
packs/min

up to  
**60**  
packs/min

POTENZA ELETTRICA INSTALLATA  
INSTALLED POWER

3 discharges belt conveyor

11,5 kW · 50 Hz · 400 V

4 discharges belt conveyor

13 kW · 50 Hz · 400 V




CONSUMO ARIA  
AIR CONSUMPTION

3 discharges belt conveyor

175 NI/min · 6 bar

4 discharges belt conveyor

240 NI/min · 6 bar

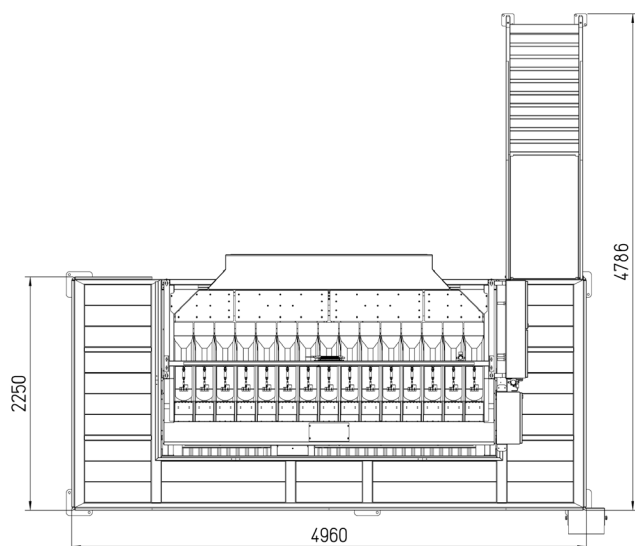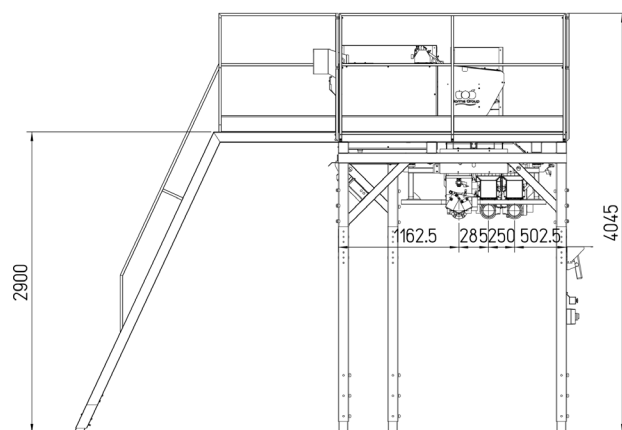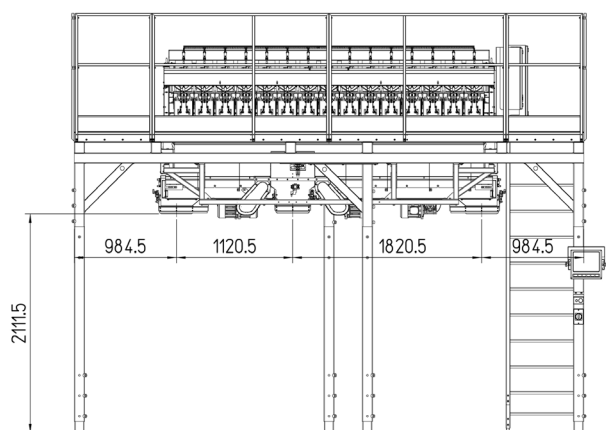

## PESATRICE ELETTRONICA P15-126

AGENTE DI ZONA / LOCAL DEALER



**SORMA S.p.A.**

via Delle Mele, 65 - 47522 Cesena (FC) - ITALY

Tel. (+39) 0547 418611 - Fax. (+39) 0547 418612

sorma@sormaitalia.com - www.sormagroup.com